



IN PRODUCTION PROGRESS REPORT

36534

Northfield Village Fire Department

5/13/2022


This week, testing and follow-up items were being addressed as your new apparatus was moving through final product evaluation. Next week, expect truck to be in customer acceptance area for final inspection.



Find Online: www.atlanticemergency.com/trucks_in_production





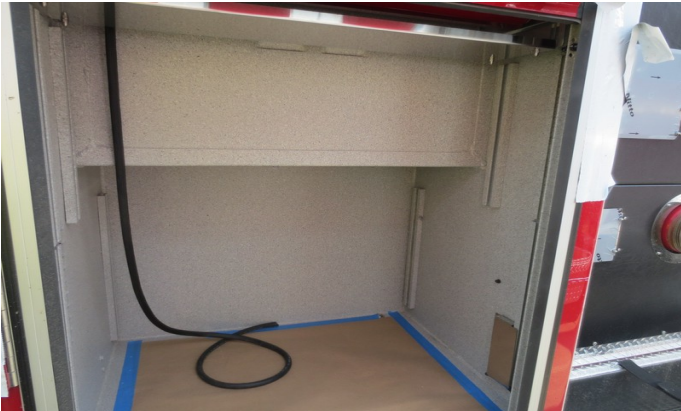





WARNING
 Position 65
 Maintaining this vehicle or exposing it to chemicals including cyanide, phthalates, and lead, may be hazardous to your health. Use of California to cause other reproductive harm.

CAUTION
 Equipment Damage
 Read service manual
 Before welding disconnect
 Battery
 Electronic devices
 Failure to comply may damage vehicle.

GVW		Tires	Max Speed	Chassis	Engine
GVW 19,451 KG (42,900 LB)		68	68 mph	Chassis	Engine
Front 8,185 KG (18,000 LB)	315R1622.5 (L)	22.5x4.50	651 KPA (100 PSI) SINGLE	COLD TIRE INFLATION	
Rear 11,266 KG (24,900 LB)	32R22.5 (R)	22.5x4.50	723 KPA (105 PSI) DUAL		

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

Capacity	Fluid Capacity	Fluid Type
Engine	34.0 L (9.0 Gallons)	SAE 15W-40 Diesel
Hydraulic	16.0 L (4.2 Gallons)	SAE 68 Hydraulic Fluid
Power Steering	3.0 L (0.8 Gallons)	SAE 57 ATF
Power Axles and Drums	12.4 L (3.3 Gallons)	SAE 90 GL/CL Oils
Anti-Lock Brake	2.0 L (0.5 Gallons)	SAE 68 Hydraulic Fluid
Idle Stop (IS)	3.0 L (0.8 Gallons)	SAE 15W-40 Diesel
Idle Stop (IS)	2.0 L (0.5 Gallons)	SAE 15W-40 Diesel
Transfer Case	8.0 L (2.1 Gallons)	SAE 85W-90 GL/CL Oils
Transfer Case - Wet Brakes	8.0 L (2.1 Gallons)	SAE 85W-90 GL/CL Oils
Transfer Case - Dry Brakes	8.0 L (2.1 Gallons)	SAE 85W-90 GL/CL Oils
CVT & Transmission	8.0 L (2.1 Gallons)	SAE 85W-90 GL/CL Oils
Wet Brake - Rear Suspension	4.0 L (1.1 Gallons)	SAE 68 Hydraulic Fluid
Wet Brake - Front Suspension	8.0 L (2.1 Gallons)	SAE 68 Hydraulic Fluid
Wet Brake - Transfer Case	8.0 L (2.1 Gallons)	SAE 68 Hydraulic Fluid









